

# REPORT DOCUMENTATION PAGE

Form Approved  
OMB No. 074-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing this collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503

<b>1. AGENCY USE ONLY (Leave blank)</b>		<b>2. REPORT DATE</b> 1997	<b>3. REPORT TYPE AND DATES COVERED</b> From Proceeding of 1997 Workshop	
<b>4. TITLE AND SUBTITLE</b> Fundamental Limits on Gas-Phase Chemical Reduction of NOx in a Plasma			<b>5. FUNDING NUMBERS</b>  N/A	
<b>6. AUTHOR(S)</b> B.M. Penetrante, M.C. Hsiao, B.T. Merritt, G.E. Vogtlin				
<b>7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)</b>  Lawrence Livermore National Laboratory Livermore, CA 94550			<b>8. PERFORMING ORGANIZATION REPORT NUMBER</b> N/A	
<b>9. SPONSORING / MONITORING AGENCY NAME(S) AND ADDRESS(ES)</b>  SERDP 901 North Stuart St. Suite 303 Arlington, VA 22203			<b>10. SPONSORING / MONITORING AGENCY REPORT NUMBER</b> N/A	
<b>11. SUPPLEMENTARY NOTES</b> This work was performed under the auspices of the US Department of Energy under contract number W-7405-ENG-48. The United States Government has a royalty-free license throughout the world in all copyrightable material contained herein. All other rights are reserved by the copyright owner. From Proceedings of the 1997 Diesel Engine Emissions Reduction Workshop.				
<b>12a. DISTRIBUTION / AVAILABILITY STATEMENT</b> Approved for public release: distribution is unlimited.				<b>12b. DISTRIBUTION CODE</b> A
<b>13. ABSTRACT (Maximum 200 Words)</b> This paper examines the gas-phase chemical reduction of NOx. It is shown that under the best conditions, the plasma can chemically reduce 1.6 grams of NOx per brake-horsepower-hour when 5% of the engine output energy is delivered to the plasma. This NOx reduction efficiency is a fundamental limit that cannot be exceeded in the absence of heterogeneous reactions or chemical additives. Higher NOx removal efficiencies would suggest reactions of plasma oxidation products (such as NO2 or nitric acid) on surfaces or particulates.				
<b>14. SUBJECT TERMS</b> NOx; NO2; nitric acid; SERDP; SERDP Collection				<b>15. NUMBER OF PAGES</b> 6
				<b>16. PRICE CODE</b> N/A
<b>17. SECURITY CLASSIFICATION OF REPORT</b> unclass.	<b>18. SECURITY CLASSIFICATION OF THIS PAGE</b> unclass.	<b>19. SECURITY CLASSIFICATION OF ABSTRACT</b> unclass.		<b>20. LIMITATION OF ABSTRACT</b> UL

## FUNDAMENTAL LIMITS ON GAS-PHASE CHEMICAL REDUCTION OF NO<sub>x</sub> IN A PLASMA

B. M. Penetrante, M. C. Hsiao, B. T. Merritt and G. E. Vogtlin  
Lawrence Livermore National Laboratory, Livermore, CA 94550

**Abstract:** This paper examines the gas-phase chemical reduction of NO<sub>x</sub>. It is shown that under the best conditions, the plasma can chemically reduce 1.6 grams of NO<sub>x</sub> per brake-horsepower-hour when 5% of the engine output energy is delivered to the plasma. This NO<sub>x</sub> reduction efficiency is a fundamental limit that cannot be exceeded in the absence of heterogeneous reactions or chemical additives. Higher NO<sub>x</sub> removal efficiencies would suggest reactions of plasma oxidation products (such as NO<sub>2</sub> or nitric acid) on surfaces or particulates.

### I. Introduction

In the plasma, the electrons do not react directly with the NO<sub>x</sub> molecules. The electrons collide mainly with the background gas molecules like N<sub>2</sub>, O<sub>2</sub> and H<sub>2</sub>O. Electron impact on these molecules result partly in dissociation reactions that produce reactive species like N, O and OH. The dissociation of N<sub>2</sub> molecules produces N. The dissociation of O<sub>2</sub> produces O. The dissociation of H<sub>2</sub>O produces OH. The N, O and OH species are the components of the plasma that eventually lead to the chemical conversion of NO<sub>x</sub>. The NO<sub>x</sub> in the engine exhaust gas initially consist mostly of NO. The ground state nitrogen atom, N, is the only species that could lead to the chemical reduction of NO to N<sub>2</sub>. The O radical oxidizes NO to NO<sub>2</sub>, leaving the same amount of NO<sub>x</sub>. The OH radical converts NO<sub>2</sub> to nitric acid. Acid products in the plasma can easily get adsorbed on surfaces in the plasma reactor and in the pipes. When undetected, the absence of these oxidation products can often be mistaken for chemical reduction of NO<sub>x</sub>.

Whether the electrons in the plasma dissociate N<sub>2</sub> or O<sub>2</sub> depends on the speed of the electrons. Slow electrons are more likely to dissociate O<sub>2</sub> and produce oxidizing radicals. Very fast electrons are required to dissociate N<sub>2</sub>. The probability for dissociation of N<sub>2</sub> has a maximum value that cannot be exceeded regardless of the plasma reactor design or other components in the exhaust gas. It is a fundamental limit dictated by the known physics of electron-molecule collisions.

In this paper we will examine the gas-phase chemical reduction of NO<sub>x</sub>. We will show that under the best conditions, the plasma can chemically reduce 1.6 grams of NO<sub>x</sub> per brake-horsepower-hour [g(NO<sub>x</sub>)/bhp-hr] when 5% of the engine output energy is delivered to the plasma.

### II. Units

The unit of electron volts (eV) is used to express both the electron kinetic energy and the electrical energy consumption. The electron kinetic energy is a measure of the speed of an electron. For example, an electron with a 1 eV kinetic energy has a speed of  $5.9 \times 10^5$  m/s, that is, 0.2% the speed of light. On the other hand, an electrical energy cost of 1 eV per NO<sub>x</sub> molecule corresponds to the usage of  $7.8 \times 10^{-4}$  bhp-hr/g(NO<sub>x</sub>). The mass of NO<sub>2</sub> is used here to represent NO<sub>x</sub>. For example, suppose the plasma requires an electrical energy consumption of 40 eV to remove one NO<sub>x</sub> molecule. If the plasma uses 5% of the engine energy output, then the amount of NO<sub>x</sub> that can be removed is  $[0.05 / (40 \times 7.8 \times 10^{-4})] = 1.6 \text{ g(NO}_x\text{)/bhp-hr}$ .



Another unit commonly used to express the  $\text{NO}_x$  conversion efficiency in the plasma is the electrical energy density, given in units of Joules per liter (J/L). It is equal to the power delivered to the plasma divided by the exhaust gas flow rate. An engine with a load of 100 kW and an exhaust gas flow rate of 7600 liters per minute (L/min) has an energy density output of  $(10^5 \text{ J/s}) / ((127 \text{ L/s}) = 790 \text{ J/L}$ . For example, suppose a plasma reactor consumes 20 J/L to remove 100 ppm of  $\text{NO}_x$ . This means that the plasma reactor will consume  $100 \times (20 \text{ J/L}) / (790 \text{ J/L}) = 2.5\%$  of the engine energy output to remove that 100 ppm of  $\text{NO}_x$ .

### III. Electron Kinetic Energy

The intent in using a non-thermal plasma is to selectively convert the input electrical energy to the kinetic energy of the electrons. An ideal situation would be where the kinetic energy of the electrons is dissipated entirely in the dissociation of NO molecules. However, because of the relatively low concentration of NO in the exhaust gas, direct dissociation of NO by the electrons is not probable. The kinetic energy of the electrons is deposited primarily into the major exhaust gas components,  $\text{N}_2$  and  $\text{O}_2$ .


The physics of electron collisions with the  $\text{N}_2$  and  $\text{O}_2$  molecules determines the electrical energy cost for the  $\text{NO}_x$  conversion chemistry. The chemistry in the plasma always start with electron-impact dissociation of the abundant molecules. The efficiency for dissociation of various molecules is determined by the average kinetic energy of the electrons. The average electron kinetic energy is determined by the electron-molecule collision cross section and the electric field experienced by the electrons.

The electrons could lose considerable kinetic energy through reactions, such as the vibrational excitation of  $\text{N}_2$ , which heats up the  $\text{N}_2$  molecule but does not promote the conversion of  $\text{NO}_x$ . The most useful deposition of electron kinetic energy into  $\text{N}_2$  and  $\text{O}_2$  is associated with the production of N and O radicals through electron-impact dissociation:



where  $\text{N}(^4\text{S})$  and  $\text{N}(^2\text{D})$  are ground-state and metastable excited-state nitrogen atoms, respectively, and  $\text{O}(^3\text{P})$  and  $\text{O}(^1\text{D})$  are ground-state and metastable excited-state oxygen atoms, respectively.

The  $\text{NO}_x$  in the engine exhaust gas initially consist mostly of NO. The ground state atomic nitrogen,  $\text{N}(^4\text{S})$ , is the only species produced by the plasma that can lead to the gas-phase chemical reduction of NO:



The gas-phase chemical reduction of  $\text{NO}_x$  is therefore determined by the electron-impact dissociation of  $\text{N}_2$ .

### IV. Collision Cross Section

The electron-molecule collision cross section represents the probability that the molecule will undergo a specific reaction (for example, dissociation) when hit by an electron. The collision cross section is expressed in units of a geometrical cross sectional area, typically on the order of  $10^{16} \text{ cm}^2$ . If the electron hits a circular target of this size perpendicular to its path and centered at the molecule, then the reaction occurs. If it misses that area, then the reaction does not occur.

The collision cross section is a fundamental quantity that has been measured by atomic physicists. The cross section for electron collision with a particular molecule is independent of the composition of the exhaust gas. The cross section for electron-impact dissociation of  $\text{N}_2$  has a maximum that cannot be exceeded regardless of the plasma reactor design or the way the electrical voltage is delivered to the plasma reactor.

Figure 1 shows the cross section for electron impact on  $\text{N}_2$  leading to neutral atomic nitrogen products [1].

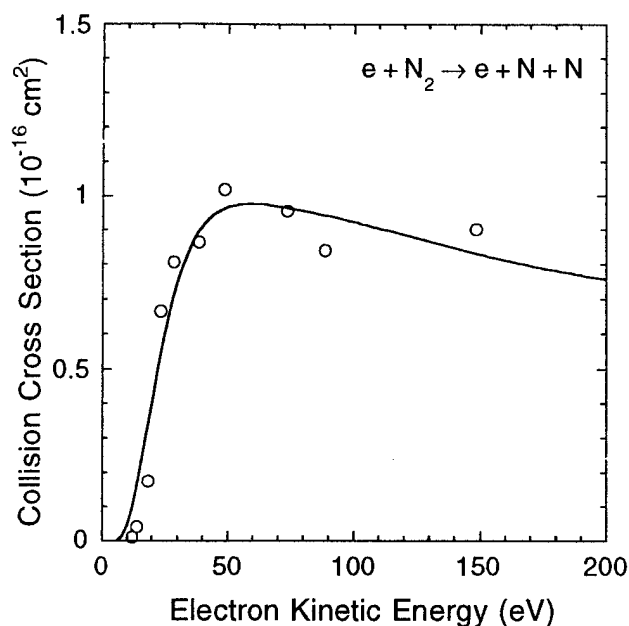


Figure 1. Cross section for electron-impact dissociation of  $N_2$ .

## V. Electric Field

There are basically only two types of non-thermal plasma reactors: discharge and electron beam. Discharge plasma reactors are those reactors in which the high voltage electrodes are immersed in the atmospheric-pressure gas stream. The attainable electron kinetic energy in this kind of reactor is very limited. The electrons collide rapidly with the background gas molecules and therefore cannot be accelerated to very high kinetic energies. Electron beam plasma reactors are those reactors in which the high voltage electrodes are in vacuum. The electrons are accelerated in the vacuum region before they are injected into the exhaust gas stream.

The electric field in a discharge plasma is determined largely by the electrical breakdown threshold. Under atmospheric-pressure conditions, the electric field experienced by the discharge plasma is between 30 and 60 kV/cm [2], as shown in Figure 2.

Because of the limited range of electric fields that the electrons experience inside a discharge

plasma, the average kinetic energy that the electrons can attain is also very limited.

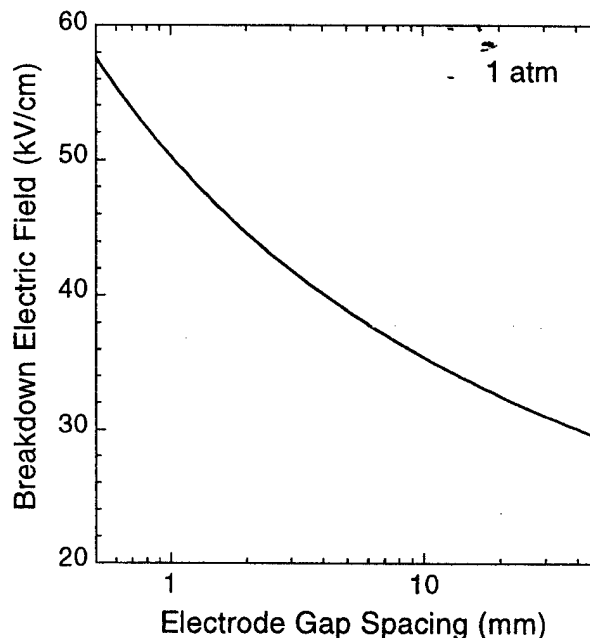


Figure 2. Breakdown electric field in an atmospheric-pressure discharge plasma.

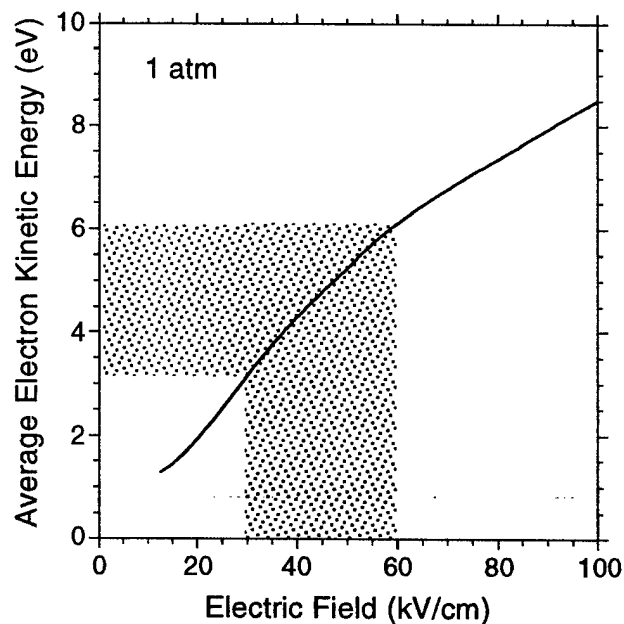


Figure 3. Average electron kinetic energy as a function of the electric field in an atmospheric-pressure discharge plasma.

Figure 3 shows the average electron kinetic energy as a function of the electric field. All discharge plasma reactors have average electron kinetic energies of 3 to 6 eV [3].

## VI. Electrical Energy Cost

For now let us assume an ideal condition in which the plasma is not producing oxidative radicals. Let us further assume that all nitrogen atoms (labeled simply as N) are used entirely for the reduction of NO:



In this case the electrical energy required to reduce NO is simply determined by the electrical energy required to produce N from the electron-impact dissociation of  $\text{N}_2$ . What is the energy required to implement this reduction scheme?

The electrical energy cost for the dissociation of  $\text{N}_2$  is proportional to the average electron speed and inversely proportional to the dissociation rate. The average electron speed, known as the electron drift velocity, is a balance between energy gain because of electron acceleration by the electric field and energy loss because of electron collisions with the molecules. Like the average kinetic energy, the drift velocity is determined by the electron-molecule collision cross sections and the electric field.

To minimize the electrical energy cost, one would like to have the highest dissociation rate. The dissociation rate is proportional to the dissociation cross section. The rate for dissociation of  $\text{N}_2$  has a maximum because of the maximum in the cross section for electron-impact dissociation of  $\text{N}_2$ . The minimum electrical energy consumption for dissociation is determined by the maximum rate for dissociation.

The electrical energy cost can be expressed as a function of the electric field or the average kinetic energy of the electrons in the plasma. Figure 4 shows the electrical energy cost for N atom production as a function of the average electron kinetic energy. The electrical energy cost for  $\text{NO}_x$

reduction by reaction (4) is equal to that for N atom production.

The electrical energy cost is very sensitive to the speed of the electrons. For most discharge plasma reactors the average electron kinetic energy is 4 eV [3]. In this case the electrical energy cost for  $\text{NO}_x$  reduction is around 240 eV per  $\text{NO}_x$  molecule. This means that if the plasma uses 5% of the engine energy output, then the amount of  $\text{NO}_x$  that can be removed is  $[0.05 / (240 \times 7.8 \times 10^{-4})] = 0.27 \text{ g}(\text{NO}_x)/\text{bhp-hr}$ . To remove 2  $\text{g}(\text{NO}_x)/\text{bhp-hr}$ , the plasma would need at least 37% of the engine's output energy!

Fast electrons are required to minimize the electrical energy cost for  $\text{NO}_x$  reduction. There are many proposals on how the electron kinetic energy can be increased. For the sake of establishing a fundamental limit, let us assume that a very high electron kinetic energy can be achieved in practice. As shown in Figure 4, the minimum electrical energy cost is 40 eV per  $\text{NO}_x$  molecule [4]. Under this condition, the plasma can chemically reduce 1.6  $\text{g}(\text{NO}_x)/\text{bhp-hr}$  when 5% of the engine output energy is delivered to the plasma.

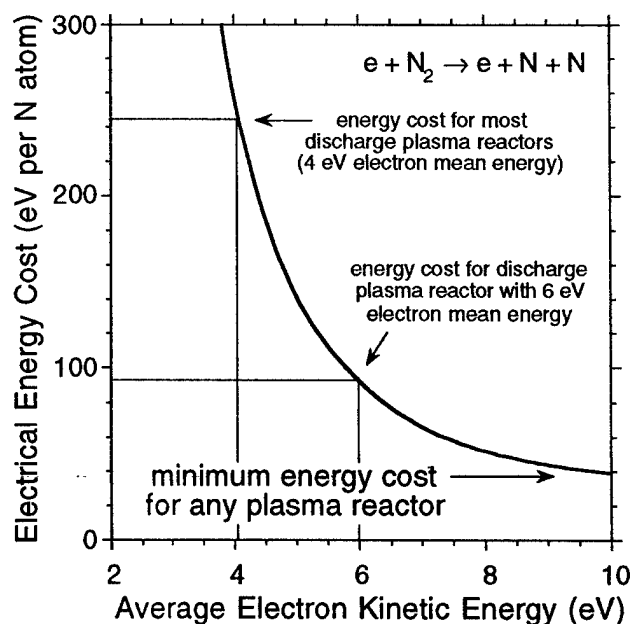


Figure 4. Electrical energy cost for N atom production as a function of the average electron kinetic energy.

Figure 5 shows the conversion between eV per  $\text{NO}_x$  molecule to  $\text{g}(\text{NO}_x)/\text{bhp-hr}$ . The curves correspond to different percents of engine output energy applied to the plasma.




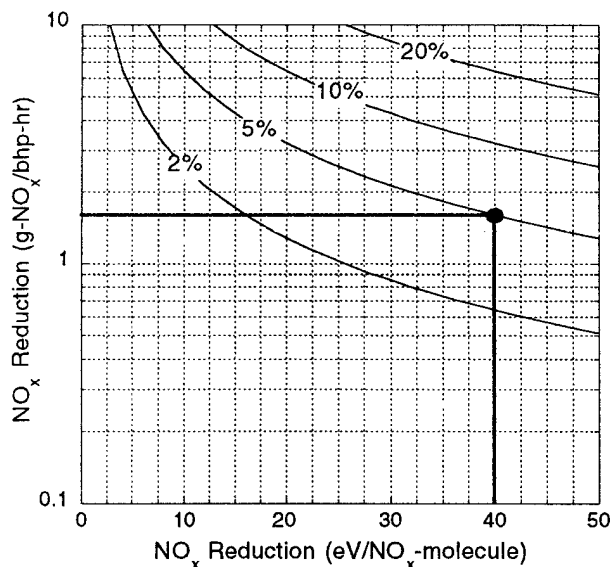


Figure 5. Conversion curves between eV per  $\text{NO}_x$  molecule to  $\text{g}(\text{NO}_x)/\text{bhp-hr}$ . The curves correspond to different percents of engine output energy applied to the plasma. The value of 40 eV per  $\text{NO}_x$  molecule is the minimum electrical energy cost for gas-phase chemical reduction of  $\text{NO}_x$  in a plasma. This energy cost corresponds to a maximum  $\text{NO}_x$  reduction of 1.6  $\text{g}(\text{NO}_x)/\text{bhp-hr}$  when 5% of the engine output energy is applied to the plasma.

## VII. Effect of Oxygen



It is much easier and cheaper for the electrons to dissociate  $\text{O}_2$  compared to  $\text{N}_2$ . The dissociation of  $\text{O}_2$  will produce only oxidative radicals. With  $\text{O}_2$  concentrations of 5% or more, a significant fraction of the electrical energy delivered to the plasma is dissipated in the dissociation of  $\text{O}_2$ . The ground state oxygen atoms,  $\text{O}(^3\text{P})$ , convert  $\text{NO}$  to  $\text{NO}_2$ :



Reactions (5) and (6) convert  $\text{NO}$  to  $\text{NO}_2$  and leaves the same amount of  $\text{NO}_x$ .

During the dissociation of  $\text{O}_2$ , a significant fraction of the atomic oxygen products is in the excited state. This metastable excited-state atomic oxygen,  $\text{O}(^1\text{D})$ , reacts with  $\text{H}_2\text{O}$  to produce  $\text{OH}$  radicals. The  $\text{OH}$  radicals convert  $\text{NO}$  and  $\text{NO}_2$  to nitrous acid and nitric acid, respectively. Acid products in the plasma can easily get adsorbed on surfaces in the plasma reactor and in the pipes. When undetected, the absence of these oxidation products are often mistaken for chemical reduction of  $\text{NO}_x$ .

In the presence of  $\text{O}_2$ , not all of the N atoms resulting from the dissociation of  $\text{N}_2$  lead to the reduction of  $\text{NO}$ . Dissociative excitation of  $\text{N}_2$  contributes a large fraction to the total  $\text{N}_2$  dissociation [5]. A significant species produced by dissociative excitation of  $\text{N}_2$  is the long-lived metastable,  $\text{N}(^2\text{D})$ . For fast electrons, over half of the total N atoms produced are in the excited metastable states. The rate constants characterizing the interaction of the metastable species  $\text{N}(^2\text{D})$  with various gases are large [6]. In the treatment of  $\text{NO}$ , there are two competing reactions involving the  $\text{N}(^2\text{D})$  metastable species:



With 500 ppm  $\text{NO}$  and 10%  $\text{O}_2$ , the  $\text{N}(^2\text{D})$  species is twenty times more likely to react with  $\text{O}_2$  than with  $\text{NO}$ . This means that  $\text{N}(^2\text{D})$  is consumed in the production of  $\text{NO}$  rather than in the reduction of  $\text{NO}$ . Whereas the reaction of ground state N atoms,  $\text{N}(^4\text{S})$ , with  $\text{O}_2$  can proceed only at very high temperatures, the reaction of excited N atoms,  $\text{N}(^2\text{D})$ , with  $\text{O}_2$  can proceed even at room temperature. Since almost half of the total N atoms produced in the plasma are in this excited state, the reduction of  $\text{NO}$  by the ground state N atoms is almost completely counterbalanced by the production of  $\text{NO}$  by the excited N atoms. What is left in terms of  $\text{NO}_x$  conversion chemistry is the oxidation of  $\text{NO}$  to  $\text{NO}_2$ .

## VIII. Heterogeneous Reactions

What we have examined in this paper is the gas-phase chemical reduction of  $\text{NO}_x$ . Heterogeneous reactions in the plasma reactor can also take place. Absorption of  $\text{NO}_2$  and nitric acid on particulates and reactor walls is often mistaken for gas-phase chemical reduction. There may be conditions in which one can take advantage of plasma oxidation products as intermediaries for the heterogeneous chemical reduction of  $\text{NO}_x$ .

## IX. Conclusions

The gas-phase chemical reduction of  $\text{NO}_x$  in a plasma can be accomplished via reaction with atomic nitrogen. Under the best condition, the plasma can chemically reduce 1.6 grams of  $\text{NO}_x$  per brake-horsepower-hour when 5% of the engine output energy is delivered to the plasma. This  $\text{NO}_x$  reduction efficiency is a fundamental limit that cannot be exceeded in the absence of heterogeneous reactions or chemical additives.

Fast electrons are required to optimize the production of atomic nitrogen from electron-impact dissociation of  $\text{N}_2$ . Unfortunately, a large fraction of the atomic nitrogen produced by the fast electrons are in the excited state. In the presence of  $\text{O}_2$ , the excited-state nitrogen atoms lead to the production of  $\text{NO}$ . Thus the development of plasma reactors that can produce fast electrons is not the key to achieving high  $\text{NO}_x$  reduction efficiency when  $\text{O}_2$  is present in the exhaust gas.

With the  $\text{O}_2$  concentrations present in diesel and lean-burn engine exhausts, the dissociation of  $\text{O}_2$  is the most dominant dissociation reaction that takes place in the plasma. The dissociation of  $\text{O}_2$  promotes the gas-phase oxidation of  $\text{NO}$  to  $\text{NO}_2$  and nitric acid, but not the gas-phase reduction of  $\text{NO}_x$  to  $\text{N}_2$ . Absorption of  $\text{NO}_2$  and nitric acid on particulates and reactor walls is often mistaken for gas-phase chemical reduction of  $\text{NO}_x$ .

## X. Acknowledgments

This work was performed at Lawrence Livermore National Laboratory under the auspices of the U.S. Department of Energy under Contract Number W-7405-ENG-48, with support from the Chemical Sciences Division of the Office of Basic Energy Sciences and a Cooperative Research and Development Agreement with Cummins Engine Company.

## XI. References

- [1] P.C. Cosby: *Journal of Chemical Physics* **98** (1993) 9544.
- [2] Y.P. Raizer: *Gas Discharge Physics* (Springer-Verlag, New York, 1991).
- [3] B.M. Penetrante, M.C. Hsiao, B.T. Merritt, G.E. Vogtlin, P.H. Wallman, M. Neiger, O. Wolf, T. Hammer and S. Broer: *Applied Physics Letters* **68** (1996) 3719.
- [4] B.M. Penetrante, M.C. Hsiao, B.T. Merritt, G.E. Vogtlin, P.H. Wallman, A. Kuthi, C.P. Burkhardt and J.R. Bayless: *Applied Physics Letters* **67** (1995) 3096.
- [5] E.C. Zipf: in *Electron-Molecule Interactions and their Applications* ed. L. Christophorou, Vol. 1 (Academic Press, New York, 1984) pp. 335-401.
- [6] K. Schofield: *Journal of Physical and Chemical Reference Data* **8** (1979) 723.